



Installing VDO Series-Z Docking Station USB Driver on Windows 7


1. Download the driver from our website www.vdocyclecomputing.com
2. Make sure the Z-USB-Dockingstation is NOT plugged in.
3. Should a scanner (USB-connector) be plugged in, please unplug the scanner while installing the Z-USB-driver.
4. Make sure you remember where you have stored the downloaded driver on your PC, so that you can find it later on.
5. Unzip the driver to a folder of your choice.
6. Plug the Docking Station into an USB Port.
7. Open the Device Manager (see Appendix B)
8. Right-click on “USB Bridge” and select “Update driver software”

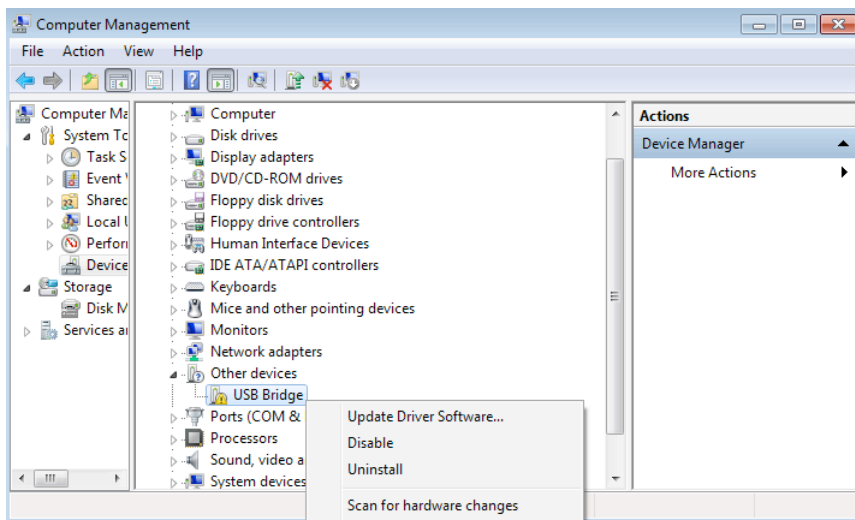

9. Select „Browse my computer for driver software“.
10. Choose the location where you stored the unzipped file of the driver and click “Next”

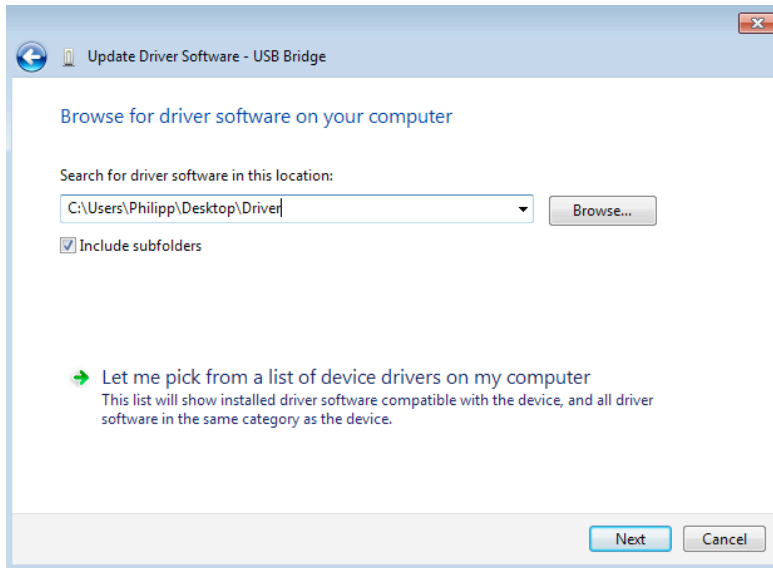


11. Select "Install"

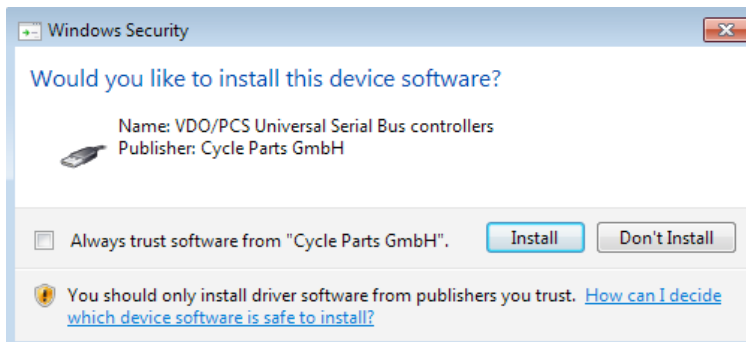

12. Your PC will now automatically install the driver.


13. After the installation is complete, the window below will appear:

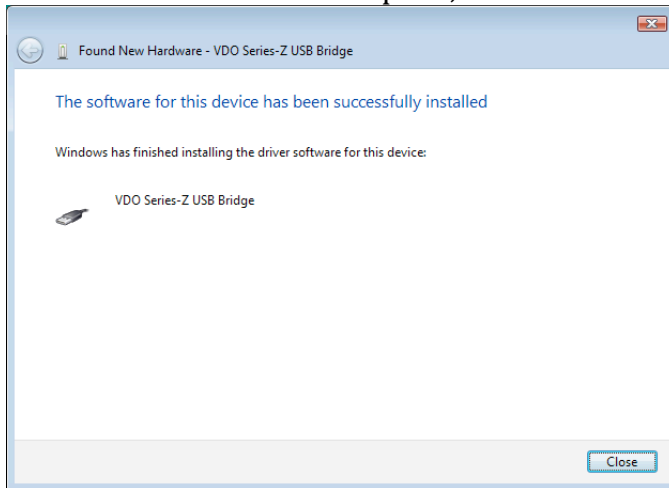

14. Click „Close“ to complete the installation

Appendix A: Ensure that the installation finished without error

1. Open the device manager (see Appendix B)
2. Expand „Universal Serial Bus Controller“
3. If the installation was completed without error you will see „VDO Series-Z USB Bridge“ in the tree (see Figure below):

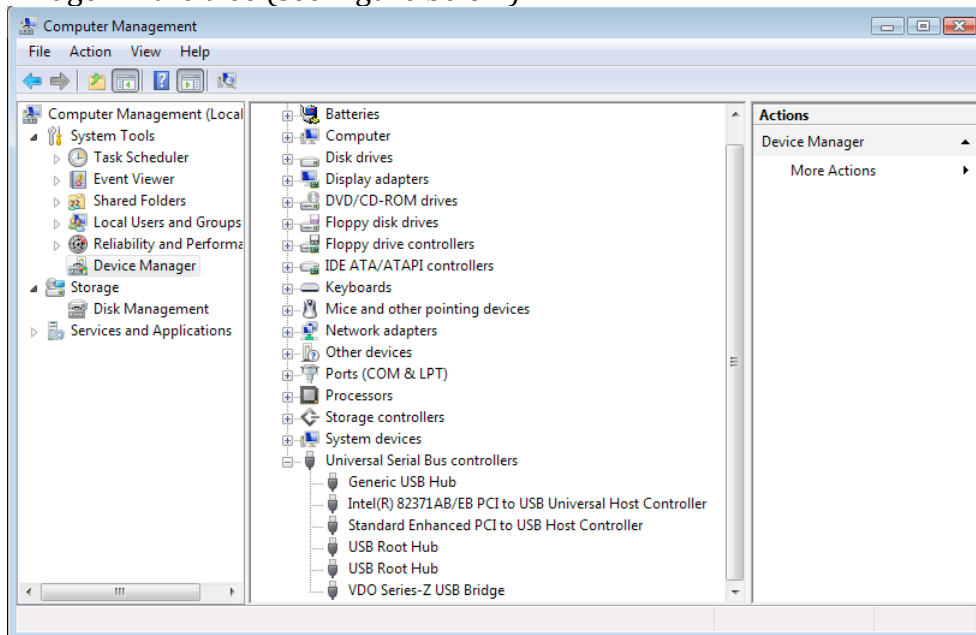

Appendix B: Opening the device manager

1. Right-click on „Computer“ in the Windows start menu, next click „Manage“, and then select „Device Manager“.